

# DATASHEET & RELIABILITY DATA

## HS15 SERIES

(주)오디피

Open Digital Power Corp.

---

# Contents

<b>- Introduction</b>	-----	3~4 page
<b>- Datasheet</b>	-----	5~8 page
1. Internal Circuit Architecture		
2. Maximum Ratings		
3. Electrical Characteristics		
4. Isolation Characteristics		
5. General Characteristics		
6. Environment		
<b>- Reliability Data</b>	-----	9~19 page
1. MTBF		
2. Life Time		
3. Environmental Stress Test		
4. Main Components $\Delta t$ Test		
5. Derating of semiconductor(Bridge Diode, FET, Rectifier diode)		
6. Abnormal Test		
<b>- Application Sheet</b>	-----	20~26 page
1. Basic Connection		
2. EMI(Electro Magnetic Interference) Connection		
3. Input Section		
4. Output Section		
5. Protection		
6. Operating Method		
7. Environment		
8. Isolation		
9. Outline Dimensions		

MAX. Power 15W Isolated On-Board Type AC-DC Converter

## HS15 Series Isolated On-Board Type AC-DC Converter



### Features

- Power Saving Mode Operation
- High Efficiency
- Isolated Input – Output
- 100kHz fixed frequency and Current mode Control
- Low output Ripple & Noise
- Built-in over current protection circuit
- Short Circuit Protection

### Applications


- Data and telecommunication
- FA control
- Datacommunication electronic equipments

- Universal Input Voltage(Free Voltage)
- Safety standard : CB, CE approved
- RoHS compatible design


### Environment

- Operating Temperature : -10°C ~ 70°C
- Operating Humidity : 20% ~ 90% RH (Non condensing)
- Storage Temperature : -20°C ~ 75°C
- Cooling : Free-Air Convection
- MTBF : 4.0 x 10<sup>5</sup> hrs

### Model Name Structure

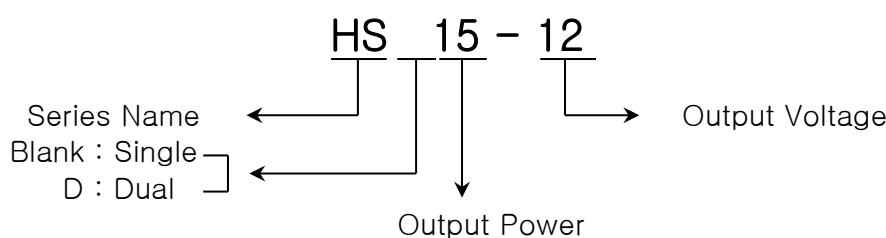

## Pin assignments & Function

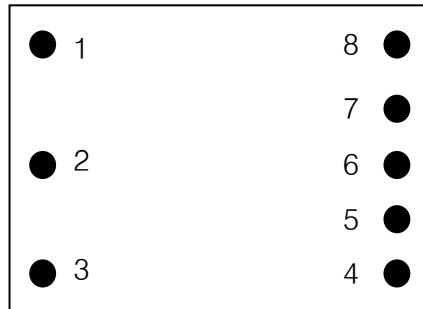

<Top View>

### - Single Output Name & Function


PIN No.	NAME	FUNCTION
1	FRG	Frame Ground
2	N	AC input N
3	L	AC input L
4	No Pin	
5	+Vout	Positive terminal for Vout
6	No Pin	
7	-Vout	Negative terminal for Vout
8	No Pin	

### - Dual Output Name & Function

PIN No.	NAME	FUNCTION
1	FRG	Frame Ground
2	N	AC input N
3	L	AC input L
4	No Pin	
5	+Vout	Positive terminal for Vout
6	Com	The common ground of Vout
7	-Vout	Negative terminal for Vout
8	No Pin	

## - Datasheet

### 1. Internal Circuit Architecture

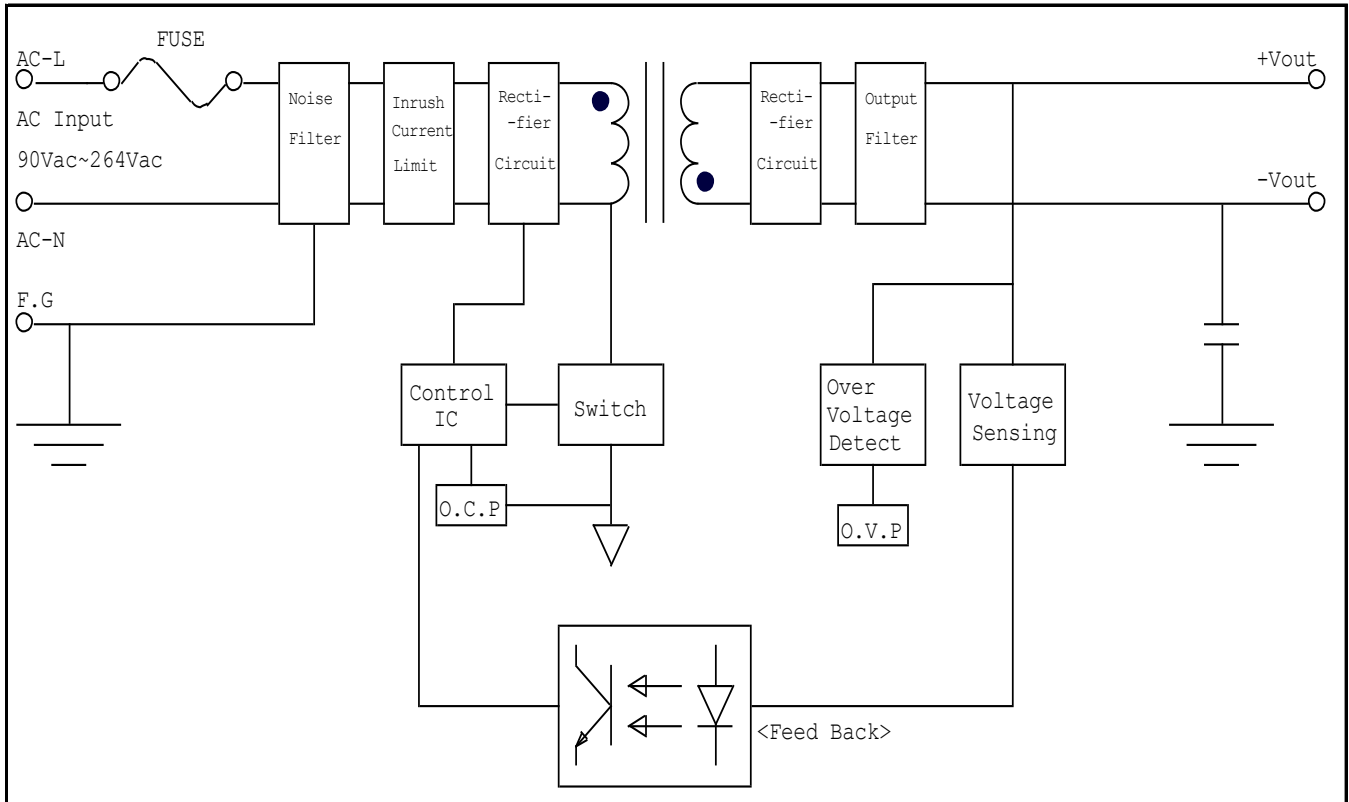

### 2. Maximum Ratings

Characteristics		Symbol	Min.	Typ.	Max.	Unit
No-load Power Consumption	HS15 - XX				0.3	W
Frequency	HS15 - XX		44	-	440	Hz
Input Voltage Continuous	HS15 - 05	Vin	90	-	264	Vac
	HS15 - 12		90	-	264	
	HS15 - 15		90	-	264	
	HS15 - 24		90	-	264	
Input Voltage Continuous	HSD15 - 1212		90	-	264	Vac
	HSD15 - 1515		90	-	264	
Operating Ambient Temperature		Ta	-10	-	70	°C
Storage Temperature		Tstg	-20	-	75	°C
Withstand Voltage (Input - Output)			-	-	3000	Vac

### 3. Electrical Characteristics

#### - Input Section

Ta : 25°C, Vin : Typical Input Voltage

Characteristics		Symbol	Min.	Typ.	Max.	Unit
No-load Power Consumption	HS15 - XX				0.3	W
Operating Voltage Range	HS15 - XX	Vin	90	110, 220	264	Vac
Frequency	HS15 - XX		44	50, 60	440	Hz
Maximum Input Current (Vin : rated, Io : 100%)	HS15 - XX	Iin		0.31		A
Maximum No Load Input Current (Vin : rated)	HS15 - XX					mA
Inrush Current (In : 220Vac)	HS15 - XX				60	A
Leakage Current (In : 220Vac)	HS15 - XX				0.35	mA

#### - Output Section

Ta : 25°C, Vin : Minimum, Typical, Maximum Input Voltage

Characteristics		Symbol	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	Single	Vo	-	-	±2	%
	Dual		-	-	±3	
Regulation	Line Regulation (From min. Vin to max. Vin, constant load)		-	-	±1	%
	Load Regulation (From no load to maximum load)		-	-	±1 ±2.5	%(@Single) %(@Dual)
Output Ripple and Noise		mVp-p	-	-	1% of Vout	mV (peak to peak)
(Vin : Rated, Io : Max., BW : 20MHz)						

Characteristics		Symbol	Min.	Typ.	Max.	Unit
Output Current	HS15 - 05	I <sub>o</sub>	-	-	3	A
	HS15 - 12		-	-	1.3	
	HS15 - 15		-	-	1	
	HS15 - 24		-	-	0.65	
	HSD15 - 1212	I <sub>o</sub>	-	-	0.65	
	HSD15 - 1515		-	-	0.5	
Output Current Limit (OCP : Over Current Protection, recovers automatically)			105	-	-	%
Dynamic Load Response (V <sub>in</sub> : rated, I <sub>o</sub> : from 10% to 100%, from 100% to 10%, BW : 20MHz, Freq. : 100Hz, Duty : 0.5, Tr/Tf : 100us)			-	-	3% of V <sub>out</sub>	mV (peak to peak)
Start - Up Time		T <sub>start</sub>				ms
Turn - on Overshoot			-	-	5	%
Efficiency (V <sub>in</sub> : Rated, I <sub>o</sub> : Max.)	HS15 - 05		-	78	-	%
	HS15 - 12		-	82	-	
	HS15 - 15		-	83	-	
	HS15 - 24		-	83	-	
	HSD15 - 1212		-	80	-	
	HSD15 - 1515		-	81	-	

## 4. Isolation Characteristics

Characteristics		Symbol	Min.	Typ.	Max.	Unit
Withstand Voltage	Input - Output		-	-	3000	Vac
	Input - FRG		-	-	2000	Vac
	Output - FRG		-	-	500	Vac
Isolation Resistance (DC500V at 25°C and 70%RH)	Output - FRG	R <sub>iso</sub>	70	-	-	MΩ

## 5. General Characteristics

Characteristics	Symbol	Min.	Typ.	Max.	Unit
Remote on / off control (CNT Pin, Negative Logic Module on : Logic Low or Short to -Vin Module off : Logic High or open)	CNT				
External Trim Adj. Range (TRM Pin, Vout variation by external parts)	TRM				
Switching Frequency			100		kHz
MTBF (MIL-HDBK-217F)		4.0 x 10 <sup>5</sup>			hrs
Dimension (L x W x H)		70.0 x 45.0 x 19.5			mm
Weight		-	-	100	grams

## 6. Environment

Characteristics	Symbol	Min.	Typ.	Max.	Unit
Operating Temperature Range	Ta	-10	-	70	°C
Operating Humidity (non Condensing)		20	-	90	%RH
Storage Temperature	Tstg	-20	-	75	°C



## - Reliability Data

### 1. MTBF

Calculating Reliable Values of MTBF

Calculated based on part count reliability projection of MIL-HDBK-217F individual failure rates  $\lambda_g$  is given to each part and MTBF is calculated by the count of each part.

Method is :

$$MTBF = \frac{10^6}{\sum_{i=1}^n Ni(\lambda_g \cdot \pi Q)_i} = \frac{10^6}{\lambda_{equip}} \quad [\text{hours}]$$

For a given equipment environment where :

$\lambda_{equip}$  = Total equipment failure rate (Failures / 10<sup>6</sup> Hours)

$\lambda_g$  = Generic failure rate for the i th generic part (Failures / 10<sup>6</sup> Hours)

$\pi Q$  = Quality factor for the i th generic part ( $\pi Q = 1$ )

$Ni$  = Quantity of i th generic part

$n$  = Number of different generic part categories in the equipment

	PART	Number	Failure Rate	Failure Rate
1	Logic IC	1	0.015	0.0150000
2	FET	0	0.012	-
3	Voltage Regulaor	1	0.002	0.0020000
4	Diode (Zener)	1	0.002	0.0020000
5	Diode (FRD)	2	0.069	0.1380000
6	Diode (SBD)	2	0.027	0.0540000
7	Bridge Diode	1	0.066	0.0660000
8	LED	0	0.00023	-
9	Varistor	0	0.0013	-
10	Photo-coupler	1	0.07	0.0700000
11	Thyristor	0	0.0022	-
12	Elec.- Cap.	4	0.019	0.0760000
13	Ceramic Cap.	7	0.026	0.1820000
14	MLCC	5	0.053	0.2650000
15	Choke coil	1	0.00022	0.0002200
16	Switching transformer	1	0.0042	0.0042000
17	Line Filter	1	0.0044	0.0044000
18	Resistor	16	0.0024	0.0384000
19	Resistor Variable	0	0.0024	-
20	Thermister	1	0.0019	0.0019000
21	Connertor	5	0.052	0.2600000
22	Soldering Point	117	0.0078	0.9126000
23	PCB	1	0.37	0.3700000
24	Fuse	1	0.01	0.0100000
Total Equipment Failure Rate ( $\lambda_{equip}$ )				2.4717200
MTBF = 10 <sup>6</sup> / $\lambda_{equip}$ (F/T)				404,576.570
<b>MTBF ≅ 400,000[Hours]</b>				

## HS15 Series AC-DC Converter

The shortest lifetime parts is an electrolytic capacitor. Thus, the lifetime of SMPS is lifetime of electrolytic capacitors.

Lifetime of electrolytic capacitor can be calculated by the following factors.

- $T_0$  : Load life rating
- $T_{max}$  : Maximum temperature rating of capacitor
- $T_{case}$  : Temperature of case

$$T[\text{hour}] = T_0 * 2^{\frac{T_{max} - T_{case}}{10}}$$

$T$  : Life Time(Electrolytic Cap.)  
 $T_0$  : Load Life Rating  
 $T_{max}$  : Max. Tepmerature rating of capacitor  
 $T_{case}$  : Temperature of case

### HS15-05 <(5VDC, 3A(100% Load)>, [unit : hrs]

110Vac Input		220Vac Input	
$T_{amb.} : 25^{\circ}\text{C}$	$T_{amb.} : 50^{\circ}\text{C}$	$T_{amb.} : 25^{\circ}\text{C}$	$T_{amb.} : 50^{\circ}\text{C}$
<b>64,000 hrs</b>	<b>11,300 hrs</b>	<b>&gt; 100,000 hrs</b>	<b>18,000 hrs</b>

### HS15-12<(12VDC, 1.3A(100% Load)>, [unit : hrs]

110Vac Input		220Vac Input	
$T_{amb.} : 25^{\circ}\text{C}$	$T_{amb.} : 50^{\circ}\text{C}$	$T_{amb.} : 25^{\circ}\text{C}$	$T_{amb.} : 50^{\circ}\text{C}$
<b>74,000 hrs</b>	<b>13,000 hrs</b>	<b>&gt; 100,000 hrs</b>	<b>18,000 hrs</b>

### HS15-15 <(15VDC, 1.0A(100% Load)>, [unit : hrs]

110Vac Input		220Vac Input	
$T_{amb.} : 25^{\circ}\text{C}$	$T_{amb.} : 50^{\circ}\text{C}$	$T_{amb.} : 25^{\circ}\text{C}$	$T_{amb.} : 50^{\circ}\text{C}$
<b>70,500 hrs</b>	<b>12,500 hrs</b>	<b>&gt; 100,000 hrs</b>	<b>19,000 hrs</b>

### HS15-24 <(24VDC, 0.65A(100% Load)>, [unit : hrs]


110Vac Input		220Vac Input	
$T_{amb.} : 25^{\circ}\text{C}$	$T_{amb.} : 50^{\circ}\text{C}$	$T_{amb.} : 25^{\circ}\text{C}$	$T_{amb.} : 50^{\circ}\text{C}$
<b>72,500 hrs</b>	<b>13,000 hrs</b>	<b>&gt; 100,000 hrs</b>	<b>19,000 hrs</b>

### 3. Environmental Stress Test(EST)

The purpose of the environment stress test is to ensure reliability by setting in advance the following environment and verified.

- transport process and conservation status
- environmental change conditions that can be applied to the product from the process of the end-user

Test cycle consists of 10 segments(total 100 hours). Test results of all segments must meet the specifications. (refer to Fig.1 & Table1)

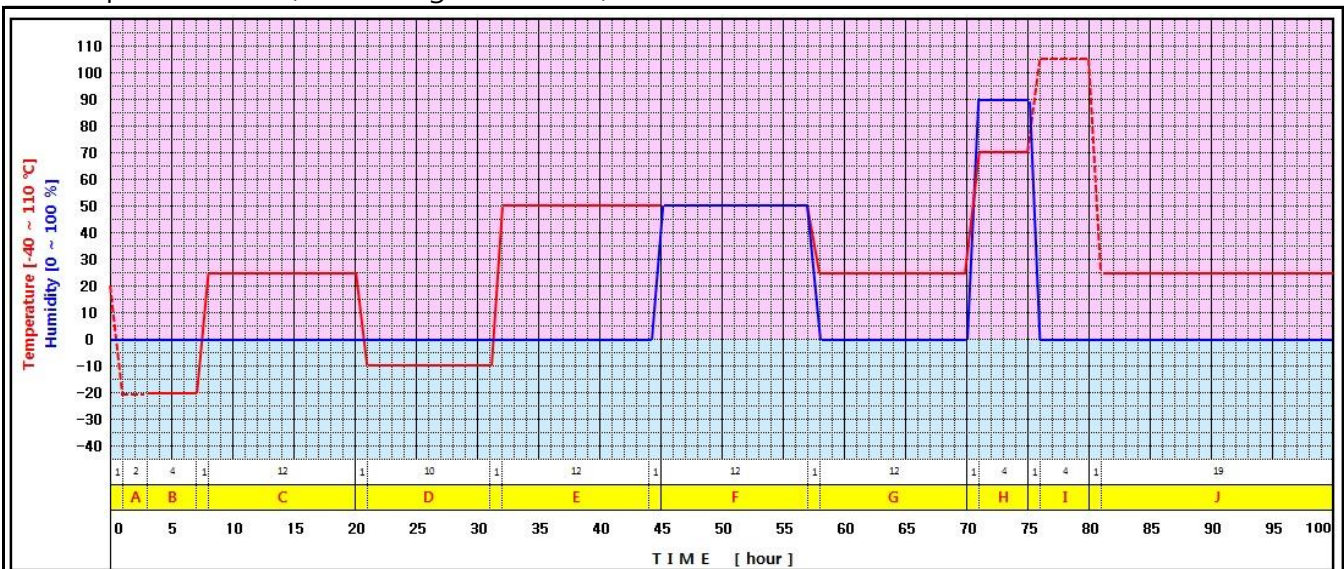

< Fig.1 : Test Cycle >

Segment	Time	Temp.	Humidity	Description	Input 'SW'
A	2 hours	-20°C	0%	Low temperature storage	off
B	4 hours	-20°C	0%	Low temperature operation	on
C	12 hours	25°C	0%	Room temperature operation	on
D	10 hours	-10°C	0%	Low temperature operation	on
E	12 hours	50°C	0%	High temperature operation	on
F	12 hours	50°C	50%	High-temperature & humidity operation	on
G	12 hours	25°C	0%	Room temperature operation	on
H	4 hours	70°C	90%	High-temperature & humidity operation	on
I	4 hours	105°C	0%	High temperature storage	off
J	19 hours	25°C	0%	Room temperature operation	on


< Table1 : Segment Description >

## HS15 Series AC-DC Converter

### 3.1. Environmental Stress Test Results

a. Test Sample : HS15-24

b. 100 hours in one cycle test graph

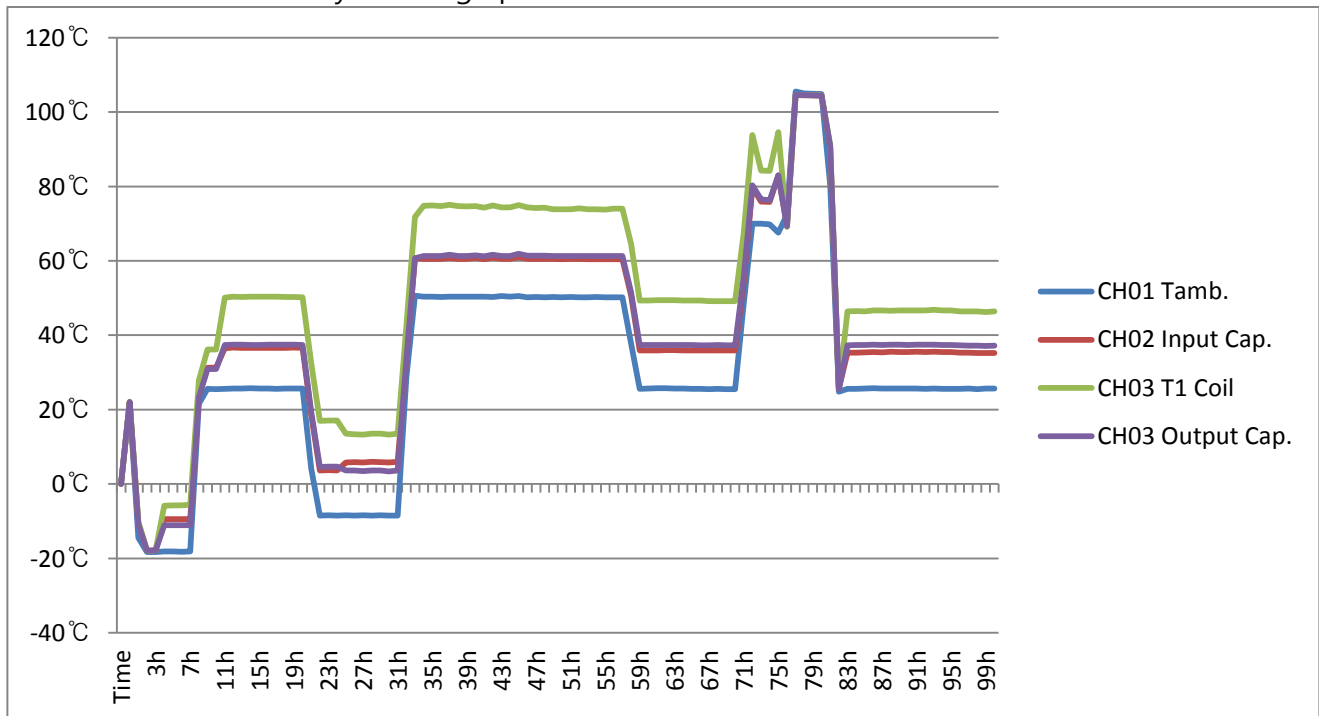

c. Characteristics test results (@ Input Voltage : 220Vac)

Segment	Test Time	T <sub>amb./Humi.</sub>	Output Voltage	Start up	Ripple / Noise	Output Load Condition
<b>A</b>	3h	-20°C / 0%	23.68V	OK	62 / 188 [mVp-p]	50% Load
<b>B</b>	7h	-20°C / 0%	23.94V	OK	46 / 168 [mVp-p]	50% Load
<b>C</b>	10h	25°C / 0%	23.99V	OK	20 / 44 [mVp-p]	100% Load
<b>D</b>	24h	-10°C / 0%	23.78V	OK	33 / 68 [mVp-p]	100% Load
<b>E</b>	33h	50°C / 0%	24.V	OK	42 / 96 [mVp-p]	100% Load
<b>F</b>	48h	50°C / 50%	24.01V	OK	11 / 35 [mVp-p]	100% Load
<b>G</b>	57h	25°C / 0%	24.V	OK	11 / 34 [mVp-p]	100% Load
<b>H</b>	72h	70°C / 90%	24.02V	OK	11 / 30 [mVp-p]	100% Load
<b>I</b>	81h	25°C / 0%	23.97V	OK	16 / 41 [mVp-p]	100% Load
<b>J</b>	100h	25°C / 0%	23.97V	OK	16 / 41 [mVp-p]	100% Load
Test Result			<b>Pass</b>	<b>Pass</b>	<b>Pass</b>	

## 4. Main Components $\Delta t$ Test

The purpose of the test is to ensure the reliability and margin by measuring the heating value of the main components.

### 4.1. HS15-05 (@ 100% Load)

Test Point \ Test Condition	Vin : 110Vac, 60Hz		Vin : 220Vac, 60Hz	
	T <sub>amb.</sub>	28.6°C	T <sub>amb.</sub>	29.4°C
	T <sub>c</sub>	$\Delta t$	T <sub>c</sub>	$\Delta t$
Bridge Diode	56.9°C	<b>28.3°C</b>	52.4°C	<b>23.0°C</b>
Input Cap.	58.6°C	<b>30.0°C</b>	52.7°C	<b>23.3°C</b>
PWM IC	74.4°C	<b>45.8°C</b>	65.0°C	<b>35.6°C</b>
Trans Coil	74.9°C	<b>46.3°C</b>	66.3°C	<b>36.9°C</b>
Trans Core	74.3°C	<b>45.7°C</b>	74.3°C	<b>44.9°C</b>
Output Diode	85.2°C	<b>56.6°C</b>	86.2°C	<b>56.8°C</b>
Output Cap.	64.5°C	<b>35.9°C</b>	65.5°C	<b>36.1°C</b>

### 4.2. HS15-12 (@ 100% Load)

Test Point \ Test Condition	Vin : 110Vac, 60Hz		Vin : 220Vac, 60Hz	
	T <sub>amb.</sub>	27.4°C	T <sub>amb.</sub>	28.0°C
	T <sub>c</sub>	$\Delta t$	T <sub>c</sub>	$\Delta t$
Bridge Diode	54.8°C	<b>27.4°C</b>	50.3°C	<b>22.3°C</b>
Input Cap.	55.3°C	<b>27.9°C</b>	51.2°C	<b>23.2°C</b>
PWM IC	65.2°C	<b>37.8°C</b>	59.8°C	<b>31.8°C</b>
Trans Coil	60.7°C	<b>33.3°C</b>	57.8°C	<b>29.8°C</b>
Trans Core	59.7°C	<b>32.3°C</b>	58.0°C	<b>30.0°C</b>
Output Diode	69.4°C	<b>42.0°C</b>	71.6°C	<b>43.6°C</b>
Output Cap.	57.8°C	<b>30.4°C</b>	58.8°C	<b>30.8°C</b>

### 4.3. HS15-15 (@ 100% Load)

Test Point \ Test Condition	Vin : 110Vac, 60Hz		Vin : 220Vac, 60Hz	
	T <sub>amb.</sub>	29.3°C	T <sub>amb.</sub>	29.0°C
	T <sub>c</sub>	Δt	T <sub>c</sub>	Δt
Bridge Diode	56.4°C	<b>27.1°C</b>	50.8°C	<b>21.8°C</b>
Input Cap.	57.9°C	<b>28.6°C</b>	51.2°C	<b>22.2°C</b>
PWM IC	66.9°C	<b>37.6°C</b>	60.5°C	<b>31.5°C</b>
Trans Coil	61.9°C	<b>32.6°C</b>	57.8°C	<b>28.8°C</b>
Trans Core	59.8°C	<b>30.5°C</b>	60.0°C	<b>31.0°C</b>
Output Diode	65.5°C	<b>36.2°C</b>	66.6°C	<b>37.6°C</b>
Output Cap.	59.0°C	<b>29.7°C</b>	60.3°C	<b>31.3°C</b>

### 4.4. HS15-24 (@ 100% Load)

Test Point \ Test Condition	Vin : 110Vac, 60Hz		Vin : 220Vac, 60Hz	
	T <sub>amb.</sub>	27.1°C	T <sub>amb.</sub>	27.6°C
	T <sub>c</sub>	Δt	T <sub>c</sub>	Δt
Bridge Diode	54.1°C	<b>27.0°C</b>	49.6°C	<b>22.0°C</b>
Input Cap.	55.3°C	<b>28.2°C</b>	50.4°C	<b>22.8°C</b>
PWM IC	69.3°C	<b>42.2°C</b>	61.3°C	<b>33.7°C</b>
Trans Coil	66.6°C	<b>39.5°C</b>	58.3°C	<b>30.7°C</b>
Trans Core	61.5°C	<b>34.4°C</b>	62.0°C	<b>34.4°C</b>
Output Diode	67.5°C	<b>40.4°C</b>	68.5°C	<b>40.9°C</b>
Output Cap.	57.6°C	<b>30.5°C</b>	59.3°C	<b>31.7°C</b>

## 5. Derating of Semiconductor

Compare  $T_{jmax}$ (maximum junction temperature) and  $T_j$  and is expressed as a percentage.  $T_j$  is the value calculated by the temperature of the case and the power dissipation and the thermal impedance.

- Measuring Components : Bridge Diode, FET, Rectifier diode
- Calculating method of derating ratio

$$\text{Derating Ratio} = \frac{T_j}{T_{j(max)}} \times 100 \text{ [%]}$$

$$T_j = T_c + (R_{\theta(J-C)} \times P_d)$$

$T_c$  : Case Temperature

$R_{\theta(J-C)}$  : Thermal impedance between junction and case

$P_d$  : Power dissipation

### 5.1. HS15-05

Condition		Vin : 110Vac, 60Hz		Load : 100%	T <sub>amb.</sub> : 50°C
Components					
BD1 (Bridge Diode)	T <sub>j(max)</sub> : 150 °C	P <sub>d</sub> : 0.43 W		T <sub>j</sub> = 89.1 °C	Derating Ratio = 59.4%
	R <sub>θ(J-A)</sub> : 25 °C/W				
	T <sub>c</sub> : 78.3°C				
IC1 (IC + FET)	T <sub>j(max)</sub> : 150 °C	P <sub>d</sub> : 0.41 W		T <sub>j</sub> = 132.7 °C	Derating Ratio = 88.5%
	R <sub>θ(J-A)</sub> : 90 °C/W				
	T <sub>c</sub> : 95.8°C				
D4 (Rectifier Diode)	T <sub>j(max)</sub> : 150 °C	P <sub>d</sub> : 1.26 W		T <sub>j</sub> = 138.1 °C	Derating Ratio = 92.1%
	R <sub>θ(J-A)</sub> : 25 °C/W				
	T <sub>c</sub> : 106.6°C				
Condition		Vin : 220Vac, 60Hz		Load : 100%	T <sub>amb.</sub> : 50°C
Components					
BD1 (Bridge Diode)	T <sub>j(max)</sub> : 150 °C	P <sub>d</sub> : 0.23 W		T <sub>j</sub> = 78.8 °C	Derating Ratio = 52.5%
	R <sub>θ(J-A)</sub> : 25 °C/W				
	T <sub>c</sub> : 73°C				
IC1 (IC + FET)	T <sub>j(max)</sub> : 150 °C	P <sub>d</sub> : 0.10 W		T <sub>j</sub> = 94.6 °C	Derating Ratio = 63.1%
	R <sub>θ(J-A)</sub> : 90 °C/W				
	T <sub>c</sub> : 85.6°C				
D4 (Rectifier Diode)	T <sub>j(max)</sub> : 150 °C	P <sub>d</sub> : 1.26 W		T <sub>j</sub> = 138.3 °C	Derating Ratio = 92.2%
	R <sub>θ(J-A)</sub> : 25 °C/W				
	T <sub>c</sub> : 106.8°C				

## HS15 Series AC-DC Converter

### 5.2. HS15-12

Condition		Vin : 110Vac, 60Hz		Load : 100%	T <sub>amb.</sub> : 50°C
Components					
BD1 (Bridge Diode)	T <sub>j(max)</sub> : 150 °C	P <sub>d</sub> : 0.43 W		T <sub>j</sub> = 88.2 °C	Derating Ratio = 58.8%
	R <sub>Θ(J-A)</sub> : 25 °C/W				
	T <sub>C</sub> : 77.4°C				
IC1 (IC + FET)	T <sub>j(max)</sub> : 150 °C	P <sub>d</sub> : 0.36 W		T <sub>j</sub> = 120.2 °C	Derating Ratio = 80.1%
	R <sub>Θ(J-A)</sub> : 90 °C/W				
	T <sub>C</sub> : 87.8°C				
D4 (Rectifier Diode)	T <sub>j(max)</sub> : 150 °C	P <sub>d</sub> : 1.04 W		T <sub>j</sub> = 102.4 °C	Derating Ratio = 68.3%
	R <sub>Θ(J-A)</sub> : 10 °C/W				
	T <sub>C</sub> : 92.0°C				
Condition		Vin : 220Vac, 60Hz		Load : 100%	T <sub>amb.</sub> : 50°C
Components					
BD1 (Bridge Diode)	T <sub>j(max)</sub> : 150 °C	P <sub>d</sub> : 0.23 W		T <sub>j</sub> = 78.1 °C	Derating Ratio = 52.0%
	R <sub>Θ(J-A)</sub> : 25 °C/W				
	T <sub>C</sub> : 72.3°C				
IC1 (IC + FET)	T <sub>j(max)</sub> : 150 °C	P <sub>d</sub> : 0.09 W		T <sub>j</sub> = 89.9 °C	Derating Ratio = 59.9%
	R <sub>Θ(J-A)</sub> : 90 °C/W				
	T <sub>C</sub> : 81.8°C				
D4 (Rectifier Diode)	T <sub>j(max)</sub> : 150 °C	P <sub>d</sub> : 1.04 W		T <sub>j</sub> = 104.0 °C	Derating Ratio = 69.3%
	R <sub>Θ(J-A)</sub> : 10 °C/W				
	T <sub>C</sub> : 93.6°C				

### 5.3. HS15-15

Condition		Vin : 110Vac, 60Hz		Load : 100%	T <sub>amb.</sub> : 50°C
Components					
BD1 (Bridge Diode)	T <sub>j(max)</sub> : 150 °C	P <sub>d</sub> : 0.42 W		T <sub>j</sub> = 87.6 °C	Derating Ratio = 58.4%
	R <sub>Θ(J-A)</sub> : 25 °C/W				
	T <sub>C</sub> : 77.1°C				
IC1 (IC + FET)	T <sub>j(max)</sub> : 150 °C	P <sub>d</sub> : 0.36 W		T <sub>j</sub> = 120.0 °C	Derating Ratio = 80.0%
	R <sub>Θ(J-A)</sub> : 90 °C/W				
	T <sub>C</sub> : 87.6°C				
D4 (Rectifier Diode)	T <sub>j(max)</sub> : 150 °C	P <sub>d</sub> : 0.80 W		T <sub>j</sub> = 94.2 °C	Derating Ratio = 62.8%
	R <sub>Θ(J-A)</sub> : 10 °C/W				
	T <sub>C</sub> : 86.2°C				
Condition		Vin : 220Vac, 60Hz		Load : 100%	T <sub>amb.</sub> : 50°C
Components					
BD1 (Bridge Diode)	T <sub>j(max)</sub> : 150 °C	P <sub>d</sub> : 0.23 W		T <sub>j</sub> = 77.6 °C	Derating Ratio = 51.7%
	R <sub>Θ(J-A)</sub> : 25 °C/W				
	T <sub>C</sub> : 71.8°C				
IC1 (IC + FET)	T <sub>j(max)</sub> : 150 °C	P <sub>d</sub> : 0.09 W		T <sub>j</sub> = 89.6 °C	Derating Ratio = 59.7%
	R <sub>Θ(J-A)</sub> : 90 °C/W				
	T <sub>C</sub> : 81.5°C				
D4 (Rectifier Diode)	T <sub>j(max)</sub> : 150 °C	P <sub>d</sub> : 0.80 W		T <sub>j</sub> = 95.6 °C	Derating Ratio = 63.7%
	R <sub>Θ(J-A)</sub> : 10 °C/W				
	T <sub>C</sub> : 87.6°C				



## HS15 Series AC-DC Converter

### 5.4. HS15-24

Condition		Vin : 110Vac, 60Hz		Load : 100%	T <sub>amb.</sub> : 50°C
Components					
BD1 (Bridge Diode)	T <sub>j(max)</sub> : 150 °C	P <sub>d</sub> : 0.43 W		T <sub>j</sub> = 87.8 °C	Derating Ratio = 58.5%
	R <sub>Θ(J-A)</sub> : 25 °C/W				
	T <sub>C</sub> : 77.0°C				
IC1 (IC + FET)	T <sub>j(max)</sub> : 150 °C	P <sub>d</sub> : 0.37 W		T <sub>j</sub> = 125.5 °C	Derating Ratio = 83.7%
	R <sub>Θ(J-A)</sub> : 90 °C/W				
	T <sub>C</sub> : 92.2°C				
D4 (Rectifier Diode)	T <sub>j(max)</sub> : 150 °C	P <sub>d</sub> : 0.65 W		T <sub>j</sub> = 113.2 °C	Derating Ratio = 75.4%
	R <sub>Θ(J-A)</sub> : 35 °C/W				
	T <sub>C</sub> : 90.4°C				
Condition		Vin : 220Vac, 60Hz		Load : 100%	T <sub>amb.</sub> : 50°C
Components					
BD1 (Bridge Diode)	T <sub>j(max)</sub> : 150 °C	P <sub>d</sub> : 0.23 W		T <sub>j</sub> = 77.8 °C	Derating Ratio = 51.8%
	R <sub>Θ(J-A)</sub> : 25 °C/W				
	T <sub>C</sub> : 72.0°C				
IC1 (IC + FET)	T <sub>j(max)</sub> : 150 °C	P <sub>d</sub> : 0.10 W		T <sub>j</sub> = 92.7 °C	Derating Ratio = 61.8%
	R <sub>Θ(J-A)</sub> : 90 °C/W				
	T <sub>C</sub> : 83.7°C				
D4 (Rectifier Diode)	T <sub>j(max)</sub> : 150 °C	P <sub>d</sub> : 0.65 W		T <sub>j</sub> = 113.7 °C	Derating Ratio = 75.8%
	R <sub>Θ(J-A)</sub> : 35 °C/W				
	T <sub>C</sub> : 90.9°C				

## 6. Abnormal Test

IEC 60950-1/Am1						
Clause	Requirement + Test				Result - Remark	Verdict
5.3	TABLE: Fault condition tests					P
	Ambient temperature (°C) .....				20 - 25	—
	Power source for EUT: Manufacturer, model/type, output rating .....				-	—
Component No.	Fault	Supply voltage (V)	Test time	Fuse #	Fuse current (A)	Observation
1. D3	SC	264 Vac	10 min	F1	1.6	Immediately output IP, NC, NT, NCD, NH, NB. FI: 0.01 to 0.23 A
2. D5	SC	264 Vac	10 min	F1	1.6	Immediately output IP, NC, NT, NCD, NH, NB. FI: 0.01 to 0.20 A
3. C22	SC	264 Vac	10 min	F1	1.6	Immediately output IP, NC, NT, NCD, NH, NB. FI: 0 to 0.14 A
4. PC1 (3, 4)	SC	264 Vac	10 min	F1	1.6	Immediately output IP, NC, NT, NCD, NH, NB. FI: 0.01 to 0.02 A
5. PC1 (1, 2)	SC	264 Vac	10 min	F1	1.6	Immediately output IP, NC, NT, NCD, NH, NB. FI: 0.01 to 0.10 A
6. D1	SC	264 Vac	10 min	F1	1.6	Immediately output IP, NC, NT, NCD, NH, NB. FI: 0.01 to 0.10 A
7. IC01(7, 8)	SC	264 Vac	10 min	F1	1.6	Immediately output IP, NC, NT, NCD, NH, NB. FI: 0.01 to 0.10 A
8. BD1 (+, ~)	SC	264 Vac	1 sec	F1	1.6	Immediately Fuse(F1) opened, NC, NT, NB, NH. FI: 0 A
9. C5	SC	264 Vac	1 sec	F1	1.6	Immediately Fuse(F1) opened, BD1 damaged, NC, NT, NB, NH. FI: 0 A
Overload test						
HS15-05 Output, T1	Overload	264 Vac	2hr 32min	F1	1.6	Load: 4.0 A -Temperature Stabilized, <Measured temperature, °C> T1 Coil: 93.3, T1 Core: 87.4 Ambient: 25.6 Load: 4.2 A -Unit IP, NC, NT, NB, NH FI: 0.02 to 0.17 A
HS15-12 Output, T1	Overload	264 Vac	1hr 50min	F1	1.6	Load: 1.8 A -Temperature Stabilized, <Measured temperature, °C> T1 Coil: 80.9, T1 Core: 75.4 Ambient: 25.6 Load: 1.9 A -Unit IP, NC, NT, NB, NH FI: 0.01 to 0.06 A

TRF No. IEC60950\_1C

IEC 60950-1/Am1							
Clause	Requirement + Test					Result - Remark	Verdict
HS15-15 Output, T1	Overload	264 Vac	3hr	F1	1.6	Load: 1.5 A -Temperature Stabilized, <Measured temperature, °C> T1 Coil: 80.9, T1 Core: 78.2 Ambient: 24.0 Load:0.63 A -Unit IP, NC, NT, NB, NH FI: 0.01 to 0.04 A	
HS15-24 Output, T1	Overload	264 Vac	3hr 17min	F1	1.6	Load: 0.9 A -Temperature Stabilized, <Measured temperature, °C> T1 Coil: 90.2, T1 Core: 91.1 Ambient: 24.9 <Maximum temperature, °C> T1 Coil: 93.9, T1 Core: 95.4 Ambient: 24.7 Load: 1.2 A -Unit IP, NC, NT, NB, NH FI: 0.01 to 0.04 A	

supplementary information:

IP – Internal Protection occurred, NT - Tissue paper remained intact  
 NC - Cheesecloth remained intact, NB - No indication of dielectric breakdown,  
 NCD – No component damaged, FI – Final Input Current


C.2 TABLE: transformers							
Loc.	Tested insulation	Working voltage peak / V (2.10.2)	Working voltage rms / V (2.10.2)	Required electric strength (5.2)	Required clearance / mm (2.10.3)	Required creepage distance / mm (2.10.4)	Required distance thr. insul. (2.10.5)
T1	Primary to Secondary	456	255	3000 Vac	4.2	5.2	0.4
Loc.	Tested insulation			Test voltage/ V	Measured clearance / mm	Measured creepage dist./ mm	Measured distance thr. insul. / mm; number of layers
T1	Primary to Secondary			3000 Vac	5.3	5.3	Minimum 2layers

supplementary information:

TRF No. IEC60950\_1C

## - Application Sheet


### 1. Basic Connection

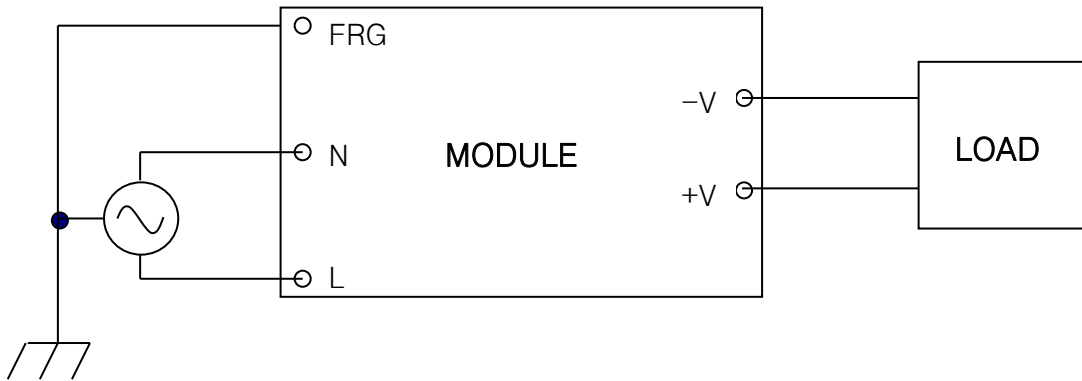

AC INPUT : 90Vac ~ 264Vac (Free Voltage)

- ※ For safety and improved noise, ensure secure connection of the FRG Pin to the ground terminal of the equipment.
- ※ To avoid excessive voltage drop and improved noise, short and thick wire should be used to connect the load.

### 2. EMI(Electro Magnetic Interference) Connection

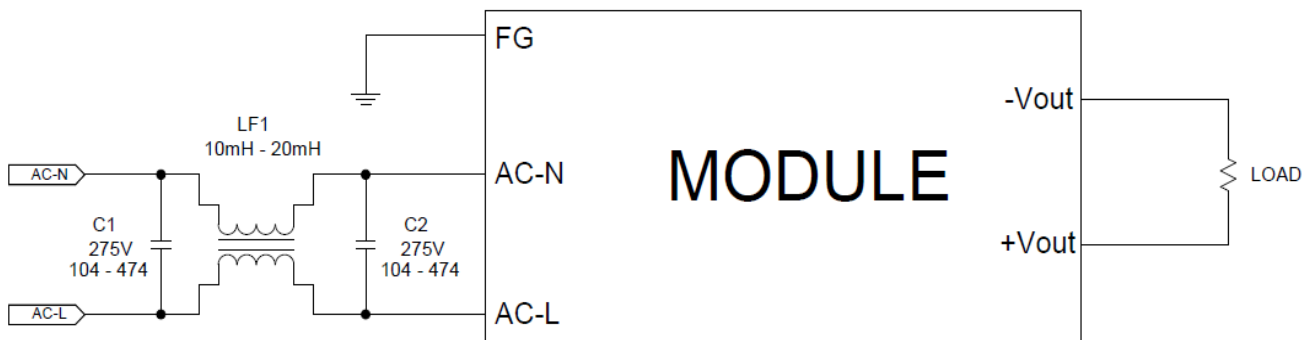

C1, C2	Y-Cap. AC 250V ~ 400V / 1000pF ~ 2200pF
LF1	Common mode line filter 10mH ~ 20mH

## 3. Input Section

### Input Fuse

Generally, ac-dc converter(HS Series) has internal fuse. Refer to Fuse Rating table. Avoid using fast-blow fuse.

< Fuse Rating table > Type : SS5, Time-Lag

	HS10	HS15
Fuse	1.6A	1.6A

UL/CSA or IEC approved type should be used to meet safety requirements.

## 4. Output Section

### Output Ripple and Noise Measurement Method

The measurement for output ripple and noise are based on normal probe with 20MHz bandwidth scope. Upon measurement of the ripple voltage, make sure that the scope probe leads are not too long. If a precise measurement can be made, the noise occurs from circumference must be reduced.

### Regulation

#### Line Regulation

The line regulation means to the change in output voltage when the input voltage is varied within the input voltage range, at constant load and constant ambient temperature. The measurement point for the output voltage are  $\pm V_{out}$  pins respectively.

#### Load Regulation

The load regulation means to the change in output voltage when the load is changed from minimum load to maximum load, at constant input voltage and constant ambient temperature. The measurement point for the output voltage are  $\pm V_{out}$  pins respectively.

## 5. Protection

### Over Current Protection

The HS series is built into an OCP(Over Current Protection) circuit. When the OCP triggers, the output voltage will fall. If overload condition is removed, the output will automatically recover.


### Short Circuit Protection

The HS series is built into an short circuit protection circuit. It is similar to OCP circuit. When output is short condition, the output voltage will fall. If short condition is removed, the output will automatically recover. However, if the short condition continues damage to the module could occur.

## 6. Operation Method

### Parallel Operation

The module can be operated parallel connection. Refer to diagram as shown below.

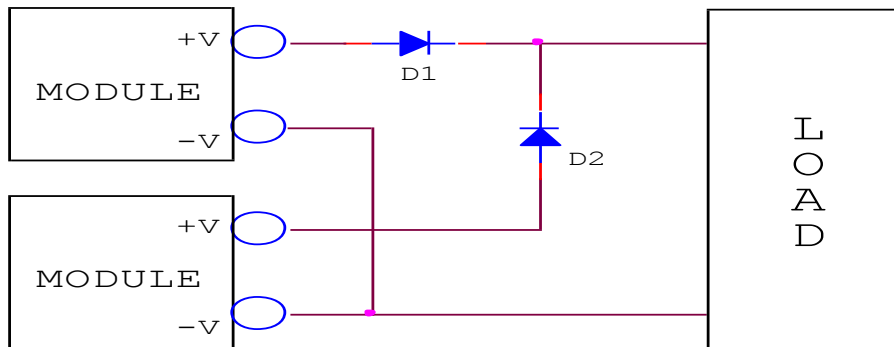

Please, you must consider both revers voltage and forward current of diode, when you choose a diode.

Maximum reverse voltage( $V_{rm}$ ) :  $V_{rm} > 1.5 \times V_o$


Forward current( $I_f$ ) :  $I_f > 3 \times I_o$

Also, design a heatsink according to power loss at diode. If you want to reduce power loss, use a schottky barrer diode.

Power loss =  $V_f(\text{forward voltage}) \times I_o(\text{output current})$

### Series Operation

Series operation is available by connecting the outputs of two or more module as shown below.

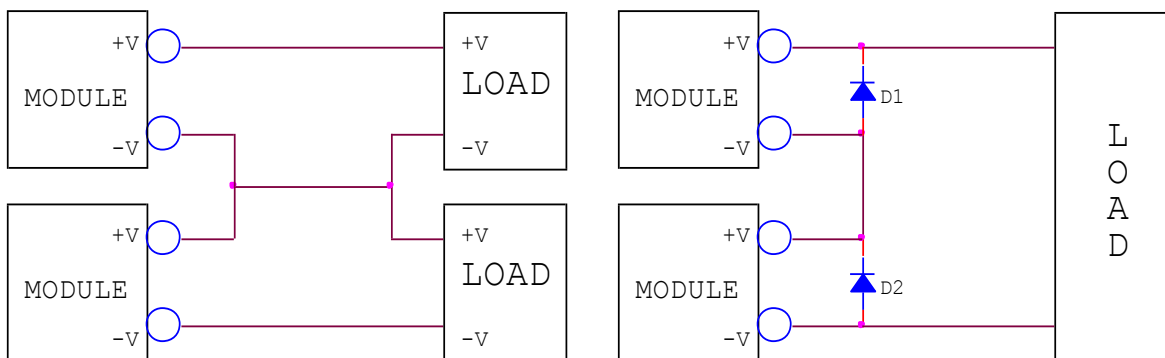

< A. General Series Operation >

< B. Complemental Series Operation >

Please, you must consider both revers voltage and forward current of diode, when you choose a diode.

Maximum reverse voltage( $V_{rm}$ ) :  $V_{rm} > 1.5 \times V_o$

Forward current( $I_f$ ) :  $I_f > 3 \times I_o$

Also, design a heatsink according to power loss at diode. If you want to reduce power loss, use a schottky barrer diode.


Power loss =  $V_f(\text{forward voltage}) \times I_o(\text{output current})$

## 7. Environment

### Temperature

#### Operation Temperature

The range of ambient temperature in °C over which a module can be operated safely at either rated or derated output power. Refer to derating curve as shown below.

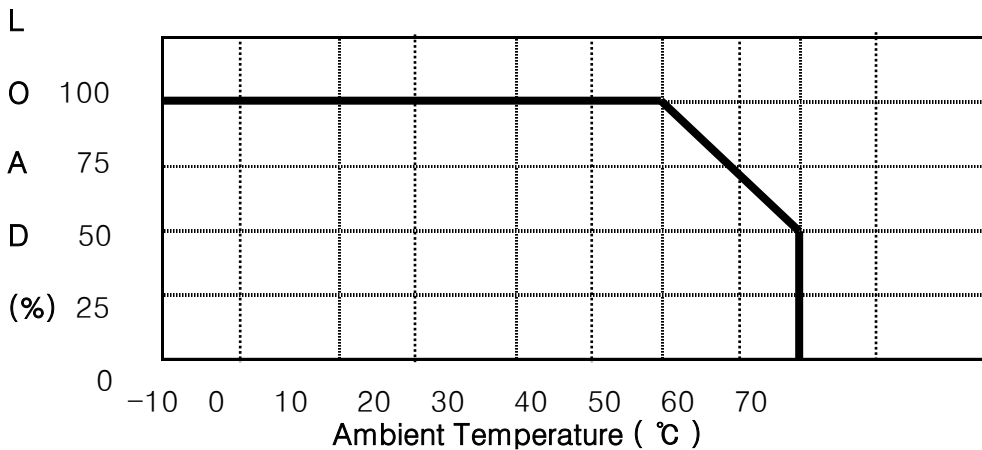

※ Operating Temperature Range : From -10°C to 70°C

### < Derating Curve >

#### Storage Temperature

The range of ambient temperature in °C over which a module may be stored long term without damage. The storage temperature range is from -20°C to 75°C.

### Humidity

#### Operation Humidity

The range of ambient humidity in % over which a module can be operated safely at either rated or derated output power. Refer to derating curve as shown below. The operating humidity range is from 20% to 90%RH.

#### Storage Humidity


The range of ambient humidity in % over which a module may be stored long term without damage. The storage humidity range is from 20% to 90%RH.

## 8. Isolation

### Isolation Resistance


The electrical separation between input and output of a module by means of the power transformer. The isolation resistance is a function of materials and spacings employed throughout the module. Please don't test with a voltage above standard voltage for the Isolation Resistance Test.

#### < INPUT - OUTPUT >

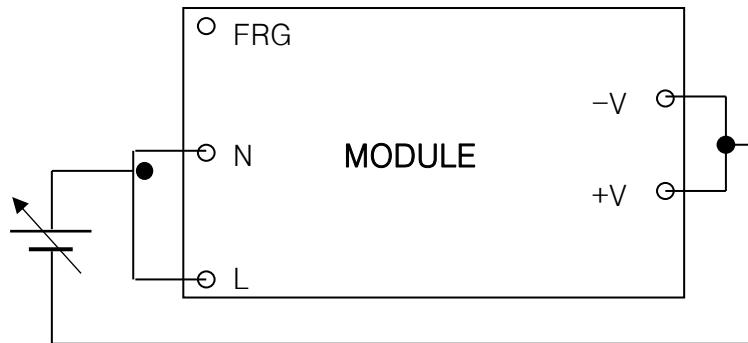


500VDC, 100MΩ

#### < INPUT - FRG >

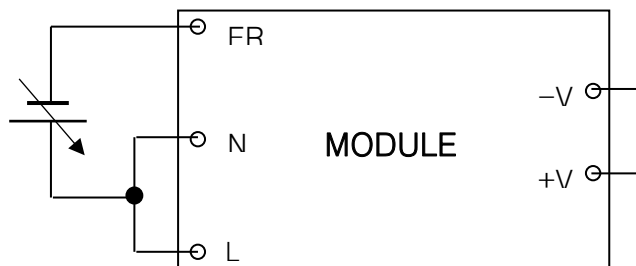

500VDC, 100MΩ

#### < OUTPUT - FRG >

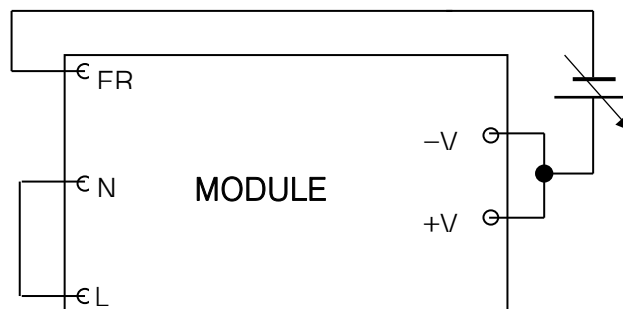

500VDC, 70MΩ




## HS15 Series AC-DC Converter

### Withstand Voltage


For the withstand voltage test, the applied voltage must be increased gradually from zero to the testing value, and then decreased gradually at shut down. Especially stay away from use of a timer. Where a pulse of several times the applied voltage can be generated.

#### < INPUT - OUTPUT >

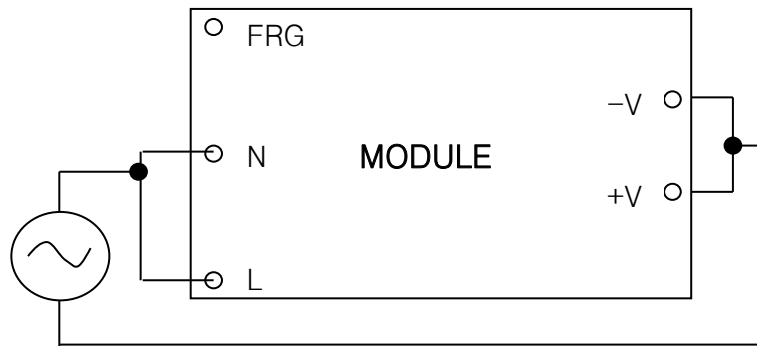


3kVAC (10mA) 1minute

#### < INPUT - FRG >

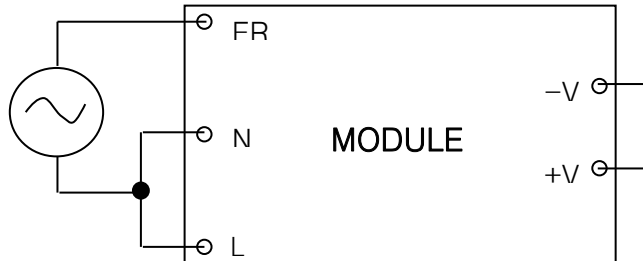



2kVAC (10mA) 1minute

#### < OUTPUT - FRG >

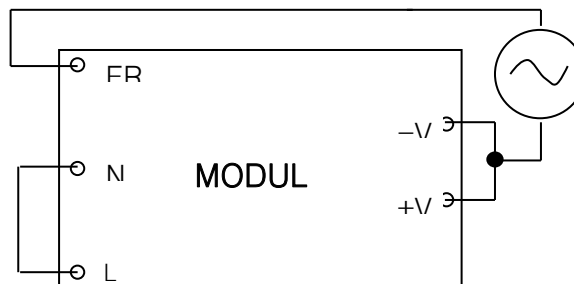

0.5kVAC (10mA) 1minute

### 9. Outline Dimensions <Unit : mm (inch)>

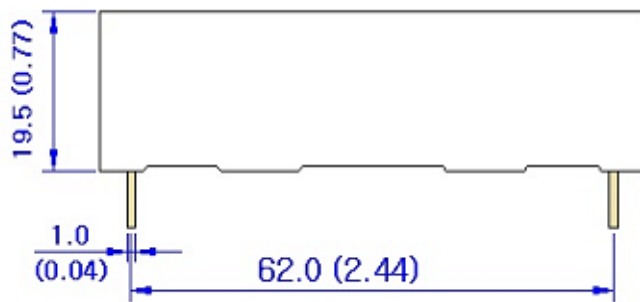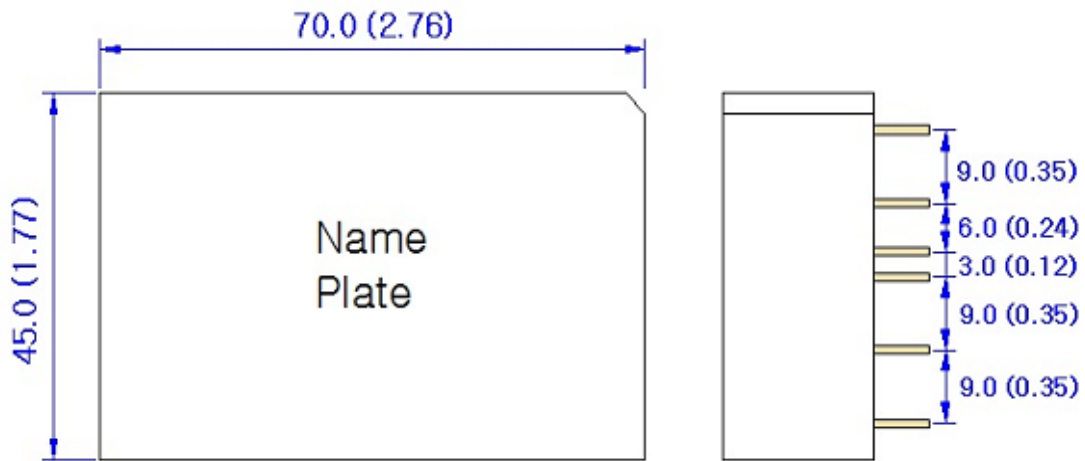

**NOTE**

1. Unit : mm (inch)
2. Weight : 100g(Max.)
3. Material : PBT

**Mounting Hole <Top View>**

