
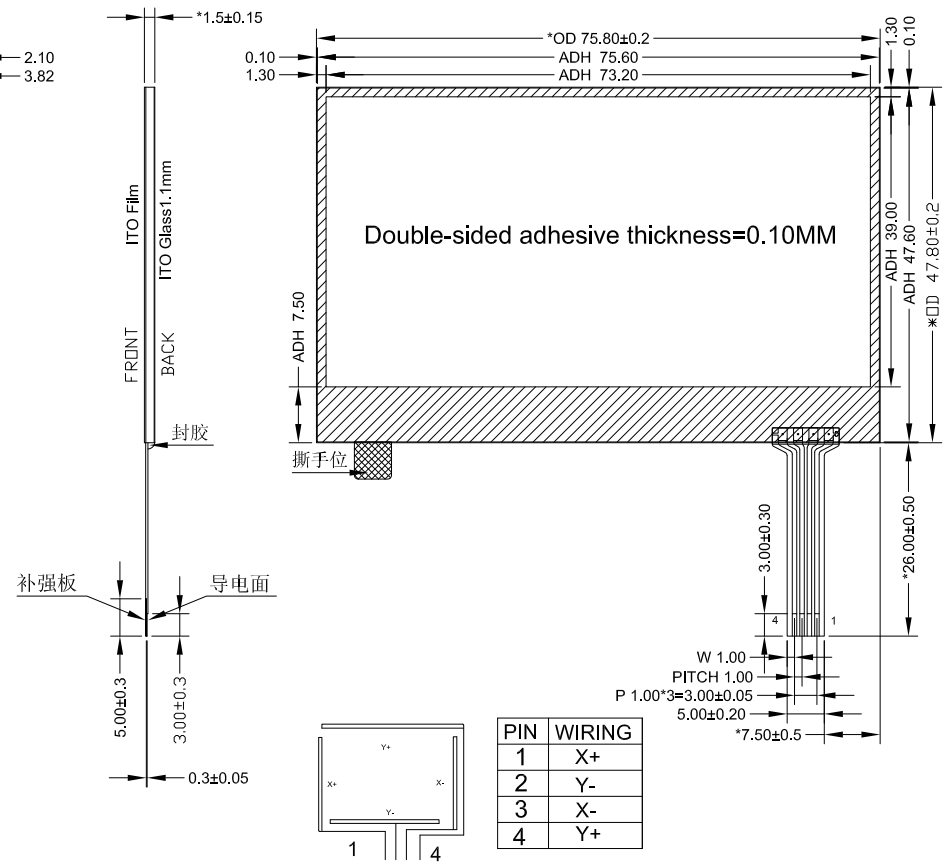


REV.	DESCRIPTION OF MODIFY	MODIFY BY	DATE
A0	1'ST_DESIGN	JIM	Sep-10-2015
A1			
A2			

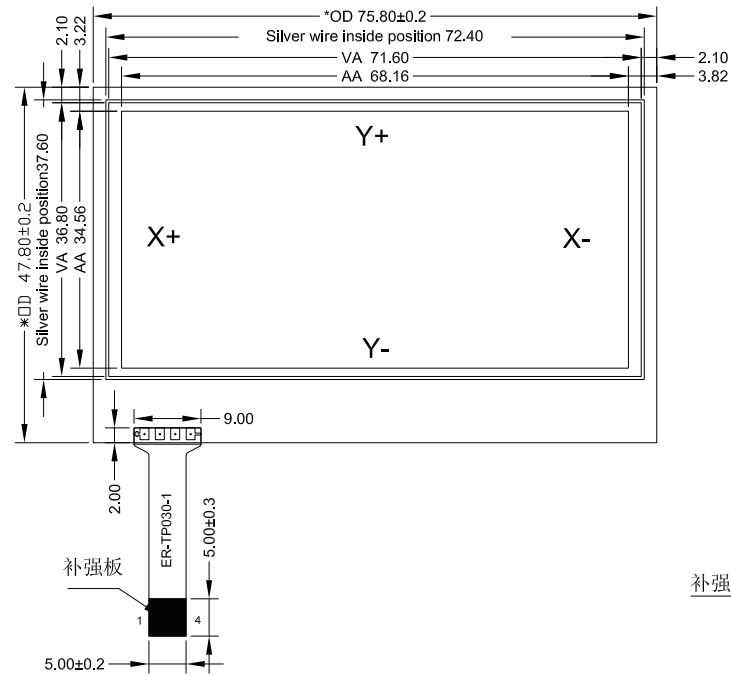

PIN	WIRING
1	X+
2	Y-
3	X-
4	Y+

**Note:**

- Structure: film+glass+FPC  
 Film: Bright screen (0.188mm)  
 Glass: 500Ω/□ (1.1mm)  
 Tail: FPC (pitch=1.0mm)  
 Thickness: 1.5±0.15mm
- Operating voltage: DC 3.0V 1mA
- Insulation resistance: ≥20MΩ(25V DC)
- Impedance: X: 100-640Ω Y: 300-1100Ω
- Response time <10ms
- Surface hardness ≥3H
- Transmittance: ≥75%
- Operation force: 40-100g
- Life time: ≥1,000,000次
- Operating temp: -20℃~+70℃, ≤90%RH
- Storage temp: -30℃~+80℃, ≤90%RH
- Tolerance ±0.20

 <b>EastRising</b> buydisplay.com	<b>EastRising Technology Co., Ltd</b> 旭日东方科技有限公司		<b>CD</b>
		UNIT: MM	SIZE: A4
		SHEET: 1 OF 1	
<b>LCM PART NUMBER: ER-TP030-1</b>			<b>REV: A0</b>
<b>DRAWN BY :JIM</b>	<b>CHECKED BY :</b>	<b>APPROVED BY :</b>	