

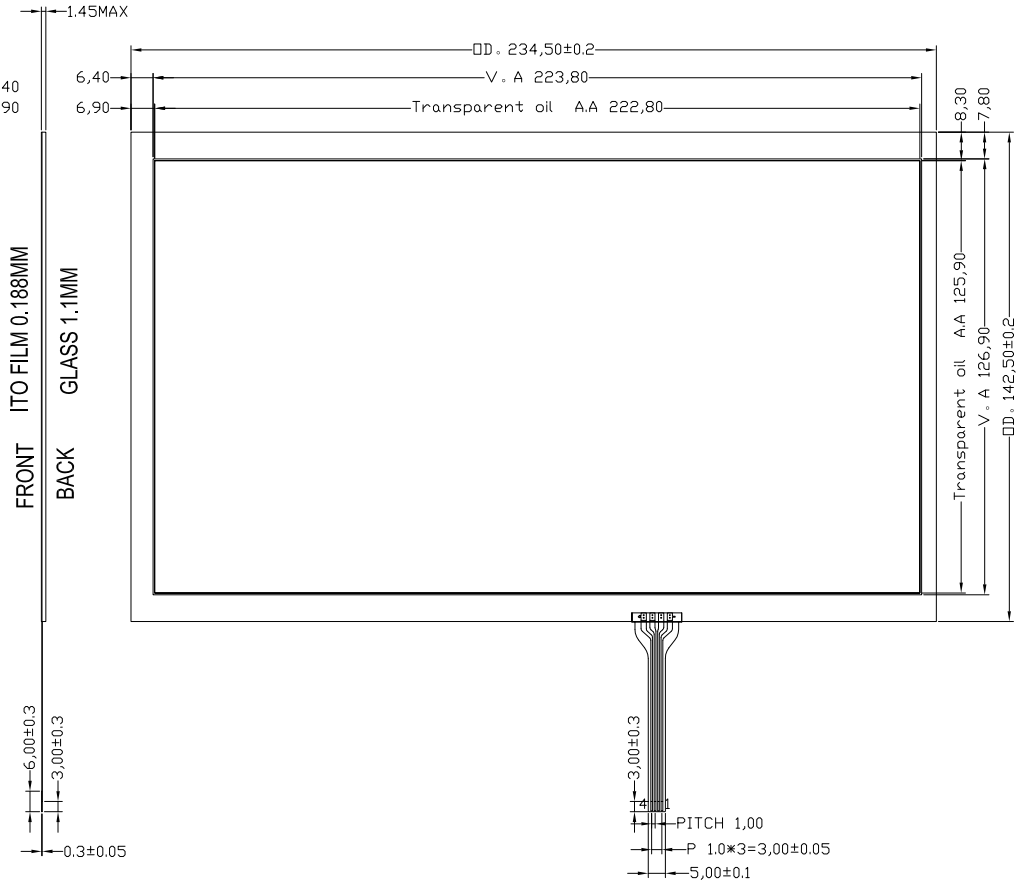




Item	Content	Date	Checked By
1	NEW DRAWING	Apr-21-2015	Mr.Jim

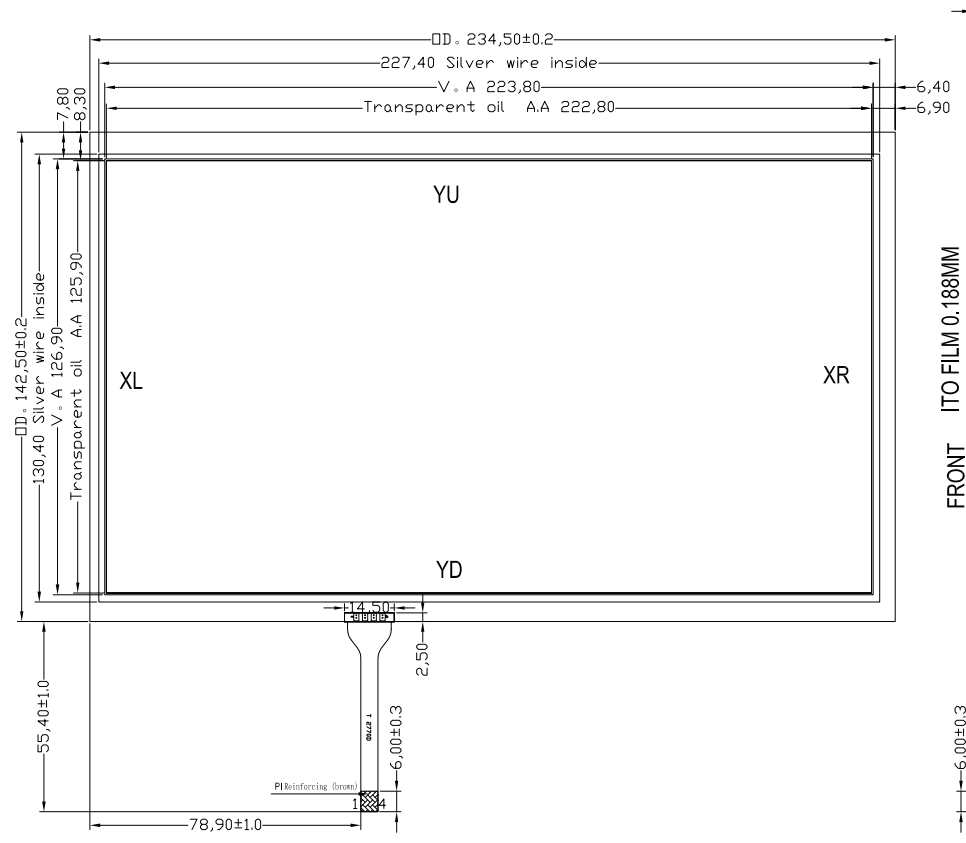

- Note:
- Structure: Film+Glass+FPC
 Film: Bright Screen (0.188mm)
 Glass: (1.1mm)
 Tail: FPC (Pitch=1.0mm)
 - Operating Voltage: DC 5.0V 30mA
 - Hardness: 3H
 - Insulation Resistance: $\geq 20\text{MQ}(25\text{V DC})$
 - Response time: $< 10\text{ms}$
 - Transmittance: $\geq 78\%$
 - Operation Force: 60-100g
 - Life Time: $\geq 1,000,000$
 - Operating Temp: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$, $\leq 90\% \text{RH}$
 - Storage Temp: $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$, $\leq 90\% \text{RH}$
 - Impedance: Y: 200-900Ω X: 200-1050Ω
 - ROHS: YES
 - Tolerance ± 0.20



Pin NO:	Assignment
1	XL
2	YD
3	XR
4	YU

 EastRising buydisplay.com	EastRising Technology Co.,Ltd 旭东视佳(旭日东方) 科技有限公司		29
			CD
UNIT: MM		SIZE: A4	
SHEET: 1 OF 1		REV: A0	
PART NUMBER: ER-TP101-1			
DRAWN BY : JIM	CHECKED BY :	APPROVED BY :	